

Tusker® reeving blocks

Features:


- Available in capacities of up to 40 000 kg
- Grease nipples for positive greasing
- Test certificates supplied
- Blank and drilled sheave wheels any size available
- Suitable for steel wire ropes
- Fitted with phosphor bronze bushed sheaves
- Available with hook and safety latch

Single sheave blocks with swivel oval eye and becket



Product Code	WLL	Rope dia	A	C	D	E	F	H
	*(tonne)	mm	mm	mm	mm	mm	mm	mm
K20250025	0.5	10-13	100	300	40	50	25	20
K20250028	1.0	10-13	125	400	50	55	31	26
K20250031	2.0	10-13	150	450	70	55	31	32
K20250034	3.0	13-16	200	600	80	70	31	36
K20250037	5.0	16-20	250	700	90	76	40	50
K20250040	7.0	16-20	300	800	92	86	40	58
K20250043	10.0	20-22	350	940	115	86	40	60

Double sheave blocks with swivel oval eye and becket

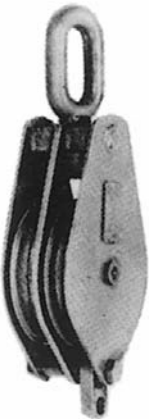

Product Code	WLL	Rope dia	A	C	D	E	F	H
	*(tonne)	mm	mm	mm	mm	mm	mm	mm
K20250026	0.5	10-13	100	300	80	50	25	20
K20250029	1.0	10-13	125	400	90	55	31	26
K20250032	2.0	10-13	150	450	110	55	31	32
K20250035	3.0	13-16	200	600	120	70	31	36
K20250038	5.0	16-20	250	700	132	76	40	50
K20250041	7.0	16-20	300	800	134	86	40	58
K20250044	10.0	20-22	350	940	158	86	40	60

Treble sheave blocks with swivel oval eye and becket



Product Code	WLL	Rope dia	A	C	D	E	F	H
	*(tonne)	mm	mm	mm	mm	mm	mm	mm
K20250027	0.5	10-13	100	300	120	50	25	20
K20250030	1.0	10-13	125	400	130	55	31	26
K20250033	2.0	10-13	150	450	151	55	31	32
K20250036	3.0	13-16	200	600	166	70	31	36
K20250039	5.0	16-20	250	700	183	76	40	50
K20250042	7.0	16-20	300	800	185	86	40	58
K20250045	10.0	20-22	350	940	214	86	40	60

