


Tusker® spelter sockets



Closed Spelter Sockets

- **Material** : GSt 52-3
- **Safety factor** : 5 times WLL = minimum breaking strength
- **Finish** : Painted or galvanised

Working load limit	Dia wire rope	Overall length	Overall width	Inside bow width	Inside bow length	B	Thickness bow	Approx Mass per pce
		A	C	D	L		K	
tonne	mm	mm	mm	mm	mm	mm	mm	kg
6	20-22	225	92	47	90	33	38	3.7
10	24-26	254	105	57	99	36	45	5.7
14	28	282	114	63	116	39	51	7.5
17.5	32-35	318	127	72	130	43	58	11
20	38	358	139	77	144	53	70	13
28	40	390	147	82	169	52	70	16
40	44-48	454	171	89	198	55	76	26
45	52-54	522	194	96	224	62	82	36
60	52-60	548	218	109	247	73	94	48
75	64-67	598	241	142	275	80	104	64
80	70-73	648	273	159	286	80	124	100
90	76-79	692	291	172	310	80	134	125
100	83-86	743	311	184	311	102	146	147
115	89-92	787	330	197	330	102	159	181
160	95-102	845	362	216	356	108	178	245

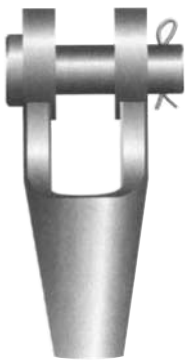

Open Spelter Sockets

- **Material** : GSt 52-3
- **Safety factor** : 5 times WLL = minimum breaking strength
- **Finish** : Painted or galvanised

Working load limit	Dia wire rope	Overall length	Inside width	Pin dia	Inside length	Approx Mass per pce
		A	B	D	L	
tonne	mm	mm	mm	mm	mm	kg
5	18-19	205	38	35	64	3.2
6.3	20-22	235	43	41	69	4.7
10	23-26	275	45	51	71	7
14	27-30	307	59	57	88	11
17	31-36	339	63	63	97	15
20	37-39	409	76	70	132	21
28	40-42	416	76	76	128	25
40	43-48	468	89	89	134	39
45	49-54	552	103	95	181	57
60	55-60	603	112	108	203	75
75	61-68	653	127	121	213	114
80	69-75	696	133	127	216	143
90	76-80	740	145	134	225	172
100	81-86	776	159	140	228	197
115	87-93	834	171	152	242	255
160	94-102	905	191	178	254	355

