


6x19 Seale = 6x(1+9+9) FC

Features:

- Galvanised rope lubricated with light dry lubrication
- Also used for the manufacture of slings
- All rope manufactured generally to EN 12385
- Supplied with manufacturer's certificate of conformance

Rope Diameter (mm)	Unit Weight kg/m	Wire Tensile	
		1770 N/mm ²	1960 N/mm ²
		Minimum Breaking Load (MBL) kN	
8.00	0.230	37.4	41.4
9.00	0.291	47.3	52.4
10.00	0.359	58.4	64.7
11.00	0.434	70.7	78.3
12.00	0.517	84.1	93.1
13.00	0.607	98.7	109.3
14.00	0.704	114	127
16.00	0.919	150	166
18.00	1.163	189	210
19.00	1.296	211	233
20.00	1.436	234	259
22.00	1.738	283	313
24.00	2.068	336	373
26.00	2.427	395	437
28.00	2.815	458	507
30.00	3.231	526	582
32.00	3.676	598	
36.00	4.870	776	
38.00	5.380	857	

Tusker® Elevator Ropes

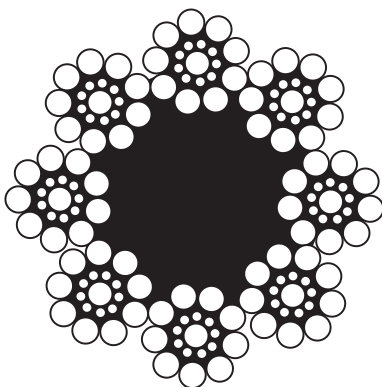

8x19 Seale = 8x(1+9+9) FC

Features:

- Suitable for all brands of elevators
- All ropes manufactured to EN 12385
- Ungalvanised rope lubricated - A1

Rope Diameter (mm)	Unit Weight kg/m	Wire Tensile	
		1770 N/mm ²	1960 N/mm ²
		Minimum Breaking Load (MBL) kN	
8.00	0.218	33.2	36.8
9.00	0.275	42.0	46.5
10.00	0.340	51.9	57.4
11.00	0.411	62.8	69.5
12.00	0.490	74.7	82.7
13.00	0.575	87.6	97.1
14.00	0.666	101.6	112.6
15.00	0.765	117	129
16.00	0.870	133	147