


Tusker® Open Wedge Sockets - Fed Spec RR-5-550D

Open Wedge Sockets

- Material: GSt 52-3
- Safety factor: 5 times WLL = minimum breaking strength
- Finish: painted or galvanised

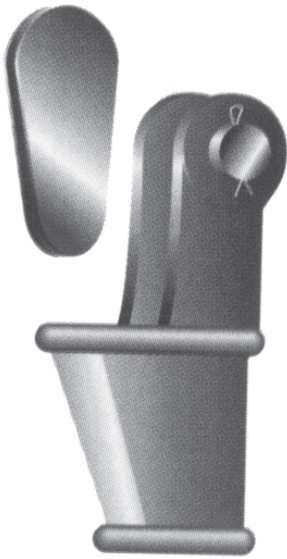

Working Load Limit	Dia wire Rope Pin	Length to Center	Inside Width	Pin Dia	Mat Thickness	Approx Mass per pce
		A	C	D	E	
Tonne	mm	mm	mm	mm	mm	kg
1.5	9-10	145	20	20	12	1.8
2.5	11-13	146	24	25	12	2.1
4	14-16	178	31	30	15	3.7
5	18-19	215	38	35	16	5.5
7	20-22	240	44	41	18	8.2
10	24-26	276	52	50	22	13.5
12	28	313	60	57	25	20.5
16	32	351	63	63	28	24.9
18	35	400	69	34	28	38
22	38	451	75	70	30	54.6
28	41	498	75	76	33	66.2
38	44-48	554	87	89	39	98.5
45	51	650	101	95	46	140.5
60	56	660	114	108	54	180
75	63	840	127	121	60	261
85	75	1000	146	133	76	330

